

TRANSDUCER OF TEMPERATURE AND STANDARD SIGNALS

HCP20 TYPE

NEW



APPLICATION

The HCP20 programmable transducer is destined to convert the temperature, resistance, voltage from shunt and standard signals into a constant-current or constant-voltage standard signal. The output signal is galvanically isolated from the input signal and the supply.

The transducer compensates automatically the resistance of wires in case of the resistance value measurement in a three-wire system and automatically compensates the temperature of terminals in case of measurements from thermocouples.

The transducer is fully configurable through the HCL14 programmer. By means of this programmer one can change the input type, the averaging time of the measurement and rescale the analog output acc. to the individual output characteristic, and also read out the measured value.

TECHNICAL DATA

Basic parameters:

- analog output galvanically isolated:	
- current	0/4... 20 mA
- voltage	0...10 V
- load resistance of the current output	≤ 500 Ω
- load resistance of the voltage output	≥ 500 Ω
- accuracy class ¹⁾	0.2
- averaging time of the transducer:	
- range: d.c. current [mA], d.c. voltage [V]	≥ 0.1 s
- other ranges	≥ 0.3 s
- power consumption	< 3 VA

- preheating time of the transducer	10 min
- response time of the transducer:	
- range: d.c. current [mA], d.c. voltage [V]	≥ 0.2 s
- other ranges	≥ 0.4 s
- current flowing through RTD	< 0.2 mA
- resistance of wires connecting RTD with the transducer	≤ 10 Ω

Rated operating conditions:

- supply depending on the execution code	85... 253 V a.c./d.c. 20... 40 V a.c./d.c.
- frequency of the supply a.c. voltage	45... 65 Hz
- ambient temperature	- 20... 23... 55°C
- storage temperature	- 25... 85°C
- related air humidity	< 95% (condensation inadmissible)
- working position	any

Input parameters:

- resistance of voltage input [V]	> 1 MΩ
- resistance of current input [mA]	12 Ω ±1%

Sustained overload:

- TC and RTD	1.1 Xn
- voltage, current and resistance	1.3 Xn

Short duration overload:

- input voltage	5 Un
- current input	10 In

Ensured protection level

acc. to EN 60529:

- housing	IP 40
- electrical connections	IP 20

Weight

0.125 kg

Dimensions

22.5 × 120 × 100 mm

Fitting

on a 35 mm rail holder

Electromagnetic compatibility:

- noise immunity	acc. to EN 61000-6-2
- noise emission	acc. to EN 61000-6-4


Safety requirements acc. to EN 61010-1:

● installation category	III,
● level of pollution	2,
● phase-to-earth working voltage:	
- supply	300 V ²⁾
- input	50 V
- output	50 V
● altitude above sea level	< 2000 m

¹⁾ A part of sub-ranges for thermocouples and RTD has a specified individual class (see table 1)

²⁾ Execution for supply voltage 230 V

DIAGRAMS OF EXTERNAL CONNECTIONS

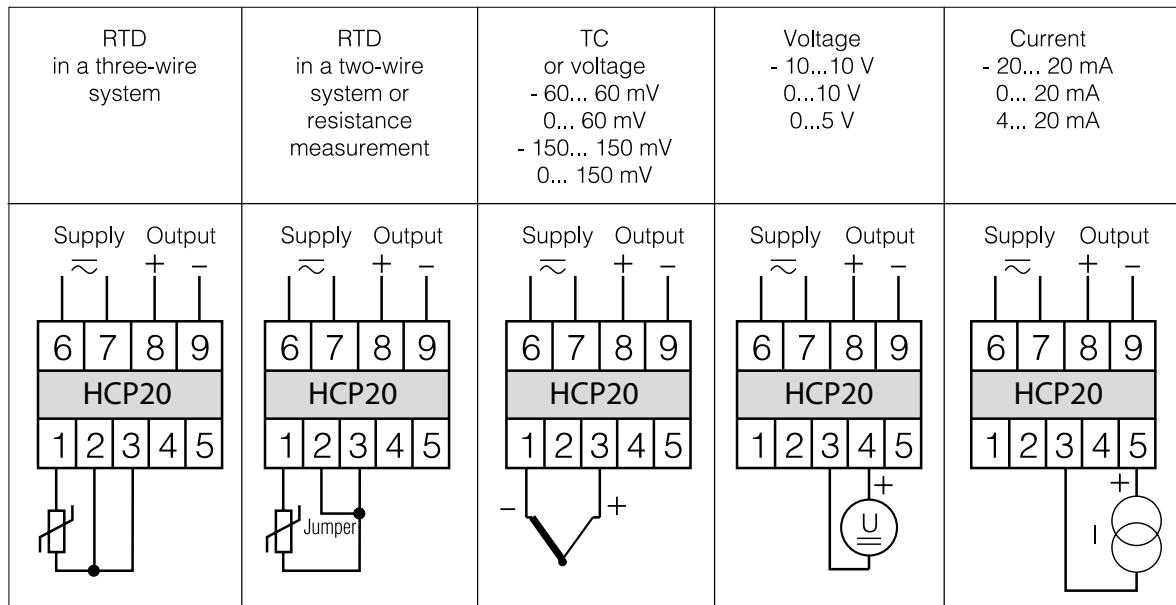

Coding of the HCP20 transducer input kind

Table 1

Type of sensor/input	Range [C]	Code
Pt100 RTD	-200...850	01
	0...850	02
	0...600	03
	0...400	04
	0...200	05
	-200...200	06
	-100...100*	07
Pt250 RTD	-200...850	08
	0...850	09
	0...600	10
	0...400	11
	0...200	12
	-200...200	13
	-100...100	14
Pt500 RTD	-200...850	15
	0...850	16
	0...600	17
	0...400	18
	0...200	19
	-200...200	20
	-100...100	21
Pt1000 RTD	-200...850	22
	0...850	23
	0...600	24
	0...400	25
	0...200	26
	-200...200	27
	-100...100	28
TC of J type	-200...1200	29
	0...1200	30
	0...1000	31
	0...800	32
	0...600	33
	0...400*	34
	-200...200*	35

TC of K type	-200...1370 0...1200 0...1000 0...800 0...600 0...400* -200...200*	36 37 38 39 40 41 42
TC of S type	0...1760 0...1600 0...1400* 0...1200* 0...1000*	43 44 45 46 47
TC of N type	-200...1200 0...1200 0...1000 0...800 0...600* 0...400* -200...200*	48 49 50 51 52 53 54
d.c. voltage	0...10 V 0...5 V -10...10 V -5...5 V 0...60 mV -60...60 mV 0...150 mV -150...150 mV	55 56 57 58 59 60 61 62
d.c. current	0...20 mA 4...20 mA 0...5 mA -20...20 mA	63 64 65 66
Resistance	0...400 Ω 0...4000 Ω	67 68
Custom-made		XX

* accuracy class 0,5

EXECUTION CODES

TRANSDUCER	HCP20	X	X	XX	XX	X
Analog outputs:						
current 0... 20 mA	1					
current 4... 20 mA	2					
voltage 0... 10 V	3					
Supply:						
85...253 V a.c./d.c.	1					
20...40 V a.c./d.c.	2					
Kind of input:						
write the code from table 1	XX					
Execution:						
standard	00					
custom-made *	XX					
Acceptance tests:						
without additional requirements	8					
with an extra quality inspection certificate	7					
acc. to customer's requirements*	X					

* after agreeing with the producer

EXAMPLE OF ORDER:

When ordering, please respect successive code numbers.

The code **HCP20 - 1 1 04 00 7** means:

HCP20 - transducer of temperature and standard signals

1 - with current analog output: 0... 20 mA

1 - voltage supply 85... 253 V a.c./d.c.

04 - Pt100 output signal on the 0...400°C range

00 - standard execution

7 - with an extra quality inspection certificate

Distribué par :



2 rue René Laennec 51500 Taissy France

Fax: 03 26 85 19 08, Tel : 03 26 82 49 29

Email : hvssystem@hvssystem.com

Site web : www.hvssystem.com