



**1,050lx**

- Meat & Food processing
- Pharmaceutical
- Bottling
- Water resistant
- Corrosion resistant

**1,200lx**

- Chemical
- Plant
- Paper converting
- Water resistant
- Oil resistant
- Corrosion resistant

**Hard to rust**



**CLK-SA**

Material of front cover:  
PMMA Resin + PET film + Tempered glass

Stainless Steel  
**SUS 316**




**CLK-SG**

Material of front cover: Tempered glass

CE  IP66G IP67G IP69K

Water, Oil, Chemical,  
Corrosion Resistant

**LED Worklight CLK**

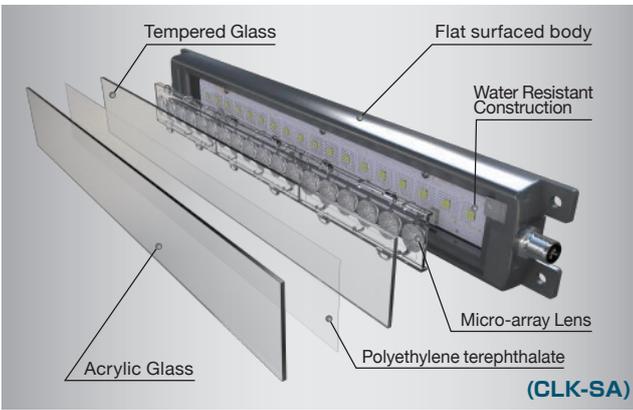

# Equipped with stainless steel housing plus three layers construction of PMMA Resin, PET Resin, and Tempered glass meets extreme conditions.

Adopting stainless steel housing with gradual slant reduce residual such as water and dust, designed to meet durable structure and maintaining cleanliness.

## Food production line



## Bottling processing line



## Pharmaceutical industry



## Brightness and light distribution at an industry leading level

### Yellow Ring Reduction



The new PATLITE "micro-array lens" is designed to even out light refraction, reduce unevenness, and "Yellow Ring" (a bad influence on lighting).

### Reduces the "Blinding Light" Effect

○ Conventional Magnification Lens    ○ New "Micro-array" Lens



This design conforms to the Photobiological Safety of Lamps and Lamp Systems (Compliance : EN62471- 2) in the Exempt Risk Group, which determines that no immediate retina damage is done.

### M12 Quick Disconnect



4-wire M12 Socket Cable, 5m (No. 1536308)  
4-wire M12 SUS Socket Cable, 5m (No. 1552447)

Option

Manufacturer: Phoenix Contact Corp

### Daisy Link a Maximum of 5 Units



4-wire M12 Link Cable, 0.6m (No. 1518892)  
4-wire M12 SUS Link Cable, 0.6m (No. 1552638)

Option

Manufacturer: Phoenix Contact Corp

Specifications Length	Stainless Steel Body Series (C-SG/C-SA)	Specifications / Materials		Water and Chemical Resistance / SUS316				
		Lens Material	Model	Tempered Glass	PMMA Resin + PET Resin + Tempered glass			
300 mm	<b>3C</b> <b>5000K</b> Stainless Steel & Glass	Model	3C-SG	3CL-SG	3C-SA	3CL-SA		
		Lens Size	300mm					
	<b>3C</b> <b>6500K</b> PMMA Resin + PET Resin + Tempered glass	Luminous Color	Daylight : 6,500K:CD Natural White : 5,000K:CN	●	△	●	△	
		Illuminance (typ.) (Center , at 24V DC)		1,200lx		1,050lx		
	Total Luminous Flux (typ.)	1,300lm						
	Connection Type	M12 Quick Disconnect						
	Rated Power Consumption	12.5W						
	Rated Voltage	DC24V						
	Operating Ambient Temperature	-40°C~+60°C (90%RH以下)						
	Protection Rating	IP66G/67G(JIS C0920:2003)/69K(DIN 40050 part9)						

<b>How to Order</b>	Wiring Specifications C: M12 Cable CL: M12 Daisy Link	Illumination Area Size 3 : 300mm	Model <b>CLK</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <b>-24</b> <input type="checkbox"/> <input type="checkbox"/>	Color CD: Daylight, CN: Natural White	Body Material SG: Stainless Steel & Glass SA: Stainless Steel & Acrylic
---------------------	--	-------------------------------------	--	--	--

● Standard product.    △ Special order.



### CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.